

D-

PERFORM-X

× perform-x

Control

× perform-x

@centrol-x

× perform->

ADVANCED DIAGNOSTIC X-RAY SYSTEMS

PERFORM-X, A MEDICAL DIAGNOSTIC SUITE THAT MEETS ALL YOUR NEEDS



This brochure features both standard and optional system elements.


FEATURES TO INCREASE PATIENT THROUGHPUT, CHOICE OF STUDIES AND OPERATOR COMFORT

AUTO-TRACKING (PERFORM-X C200+ / F200+)



Motorized vertical syncing of x-ray tube and table top, keeping preset source-image distance (SID) constant






Motorized one- or two-way vertical syncing of x-ray tube and vertical detector

TABLE IMAGE RECEPTOR AUTO-ALIGNMENT (PERFORM-X C200+ / F200+)





Motorized alignment of table image receptor with x-ray tube movement and rotation

DOSE-OPTIMIZED SMART STITCHING* (PERFORM-X C300+ / F300+)

- PXIM System Software calculates dose-limiting lowest necessary number of exposures based on set Start and End positions
- \cdot Automatic system positioning executes programmed stitching procedure
- Procedure is performed with constant focus, rotating x-ray tube
- Overlapping images are combined into seamless study
- Vertical stitching for up to 5, Horizontal stitching** for up to 3 images
 Stitching Stand is available to assist frail patients for vertical procedures



* Smart Stitching Procedure requires Auto-Collimation ** Horizontal stitching on the patient table requires Auto-Positioning features.



AUTO-POSITIONING (PERFORM-X C400 / F400)

- APR-controlled automatic positioning moves system into place for procedure
- APR positioning from Workstation
- Favourite APRs can easily be selected
- Anti-collision sensors ensure safe operation





SCAN OR CODES FOR VIDEOS FEATURING THE PERFORM-X C400 AND F400 SYSTEMS



CEILING-MOUNTED SYSTEM

- Customizable for any room height, including with low ceilings
- Variable longitudinal and cross-table travel ranges
- Maximum flexibility in system
 positioning
- Easy access to both sides of radiographic table
- Motorized movement with manual override

VERTICAL STAND

- Receptor travels to the floor
- Fail-safe electromagnetic brakes
- LED system status light on stand (standby, tracked, error)
- Free-standing set-up
- Motorized or manual tilting receptor for full positioning flexibility
- \cdot Optional in-bucky charging of detector



10" OR 12" SMART CONSOLE

- \cdot Enables full system integration with PXIM System Software
- Control of all movements in one place
- Access to favourite APR positions
- Quick Image Preview to evaluate exposure
- Integrated generator parameter control
- Live collimator Camera view
- Patient Positioning Guide to assist operator
- User Comfort Settings (e.g. table pedal lock) -
- System status and error monitoring —

















Wired or wireless remote control for motorized movements



Easy-to-use membrane console

HIGH QUALITY COMPONENTS

- Receptor Tray with in-bucky charging or Receptor rotating mechanism (docking station)
- \cdot Wide selection of Industry-leading X-ray tubes
- Manual or automatic Collimators, including with Camera and Proximity Sensor
- High-density removable grids (non-oscillating)




FULL DR SYSTEM INTEGRATION

DOSAGE LIMITATION AND GENERATOR CONTROL OPTIONS

- Automatic Exposure Control (AEC) and Dosage Area Product (DAP) meter to avoided unnecessary dose
 32 kW to 80 kW generator output range
- Stored energy generators up to 32 kW (capacitor discharge)

perform-x MODULAR SOFTWARE (PXIM):

- **PXIM Console** LCD user interface for Movement selection, Generator settings, Image Preview and other advance features
- PXIM Embedded Control Modular embedded software enabling Automated Tracking, Stitching, Positioning, Safety sensors and overall Communication
- PXIM Service Remote Diagnostics and Calibration

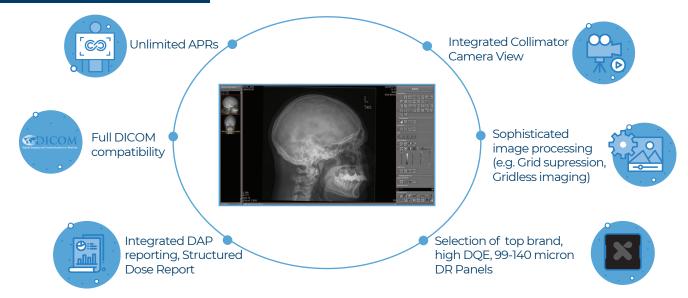


CANON SOFTWARE INTEGRATION WITH PREMIUM DR PANELS

Canon



ARTIFICIAL INTELLIGENCE SUPPORTED CLINICAL DIAGNOSTIC SOLUTIONS





REMOTE DIAGNOSTICS

Advanced diagnostic

		Hardware Monitor Ma	Cantrale							
ectante/		15 33 OBPH2 (M	tal Stard							
		Bord State Aurolado								
ctive boards		Modan St 2	Outputs	Notor State	Critinus			90.2	0	0
21-195 Hold		Appleadon	C FID Hove	· THE CAN	PLCalbured			Phoenix Lable		
		C Sex Devn	C REVINOVA	· Sector	POCelowed			0.0 on	-	1.0
	18	Cong to th	PED 264040-010*	Oreganite	wid calbraten			0.0		1
		See Ox	C RC Dalled GvP	OC Send ON	Reverse Calibration				-	1
		Profeset	 Outline 	Henal Bit Ref.	(tearing)			Table Shand		
	-	REI Request	O Drafte Halkabe	Pres Rode	(hearved)			0.0	1	18
		PD og send en		© SW MAX	@ (hear-ed)			0.0		G
	ed al	@ (croned	 Overval is scare 	 Lite encoder 	@ (hearved)					
	ed .	0000-0000-0+000	1000 2000 -0x80	3000 3000-0-00	00004112-0407			0.0		
	*							0.0	1	
	iervice.	Calibration and Current Nov	De la companya de la	in test PE Controler						2
1	-	hater	Interference (Hoter Current Incil		Ge to position:	0.0		
- 1	_		P1 0	CT (0/P1 347	motion Heteroment # r		0	wai ser / tole t		_
	ered	cm 105.2	P1 0	CEL CHAIL 347	Pribanik	-		1446 0.0	Ŧ	
		pot: 1761	P2 0	CR CK12 182.8	(HOLD)			Colonicy	_	-
- 1	205							0		
			s a Del Dridinos 3	Currentlys	unter Foller	a the second sec				
		Read Freeh		5		Test Loope		0		
- 1		CelDela	Set Brd Pos 3	Currentlys	•		Overge NC band State	*		
				_				244		



FOUR STANDARD CONFIGURATIONS

IN BOTH CEILING- AND FLOOR-MOUNTED SYSTEMS

PERFORM-X SYSTEM CONFIGURATIONS

	Model Code	Manual (Counterbalanced)	Auto-Tracking	Auto-Stitching	Auto-Positioning
b d	F100	✓			
Floor-Mounted	F200	√			
or-M	F300	1		✓	
문	F400	√		✓	4
ted	C100	✓			
4oun	C200	1	✓		
Ceiling-Mounted	C300	1		✓	
Ceil	C400	J	.√	✓	

Certifications

ISO 13485, CE marked and FDA registered



Authorized distributor:

